


## Flight Type Dishwasher

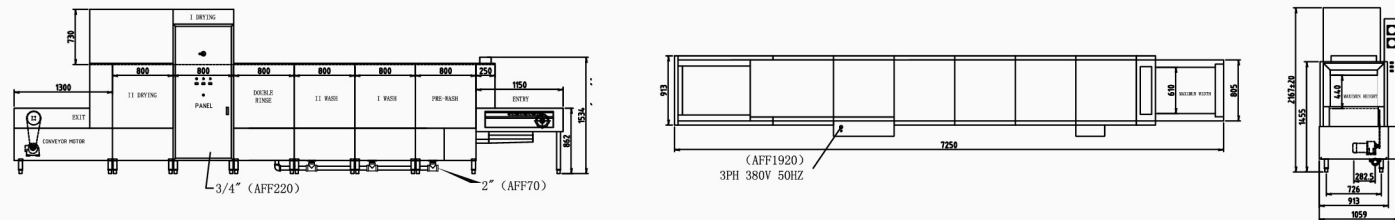


### Features

- Automatically start wash and rinse with energy saving infrared sensor control system
- Imported brand wash motor 2 IP55/2.2kW comply with SUS304 stainless steel pump body and impeller; wash pump with 1.1kg water pressure with special nozzle design wide angle water jet type that perform a great washing result with 1~2kg washing pressure, enhance washing quality
- Wider space between wash and rinse section, avoid cross contamination, enhance washing quality
- Double layer door and body to prevent heat loss, energy saving and reduce noise
- Whole machine is made of SUS304 stainless steel for durability, compliance with hygiene and anti-rot

## Flight Type Dishwasher

Model	VT-F2RD2	VT-F3RD2
Flight Type	2 Tank+2 Rinse+2 Dryer	3 Tank+2 Rinse+2 Dryer
Dimension	6250*1059*2167mm	7050*1059*2167mm
Loading Dimension	610*420mm	610*420mm
Capacity	2.0~6.0m/min or 3240~9720plates/hr	2.0~6.0m/min or 3240~9720plates/hr
Rinse Usage	600L/Hrs	600L/Hrs
Wash Pump Power	1.5~2.2kw	1.5~2.2kW
Wash Tank Heater	15kW	15kW
Booster Heater	45kW	45kW
Rinse Pump Power	0.25kW	0.25kW
Conveyor Motor	0.75kW	0.75kW
Inlet / Outlets	3/4" / 2"	3/4" / 2"
Dryer Loading	1.5kW/12kW	1.5kW/12kW
Power Supply	400V/50Hz/3ph	400V/50Hz/3ph
Steam Supply	150kg/hr	170kg/hr
Electrical Loading	110kW/10kW	130kW/12kW
Steam Pipe	1.5"/After decompression 3/4"	1.5"/After decompression 3/4"
Steam Pressure	After decompression 3~5KG	After decompression 3~5KG

### VT-F2RD2

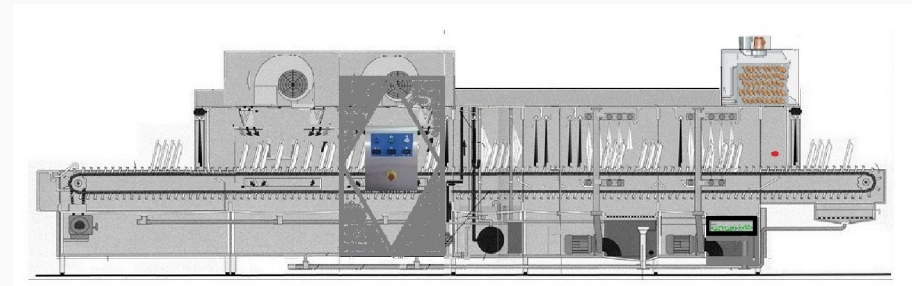

### VT-F3RD2

